
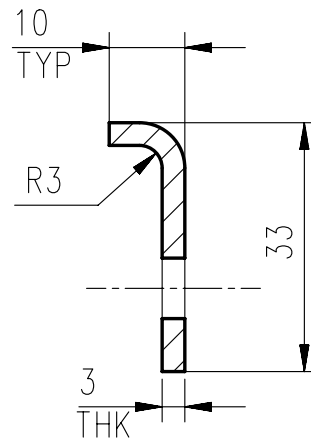
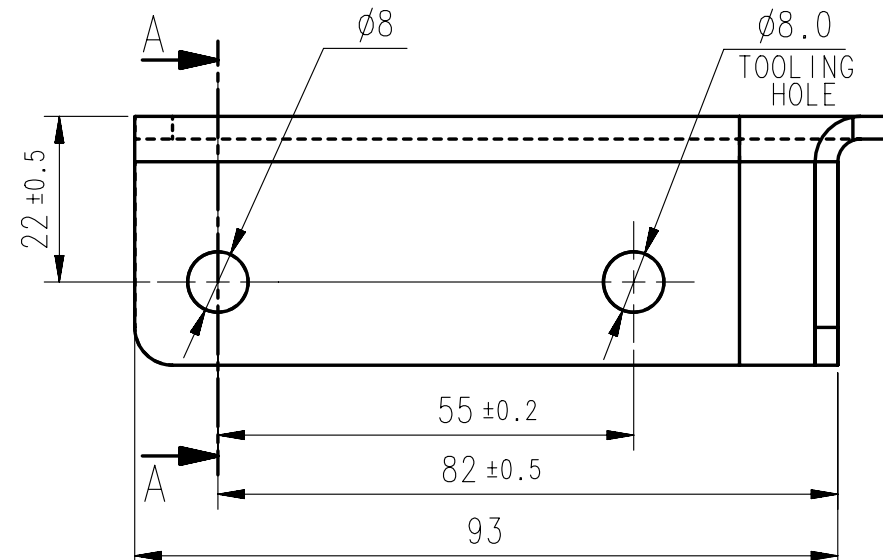


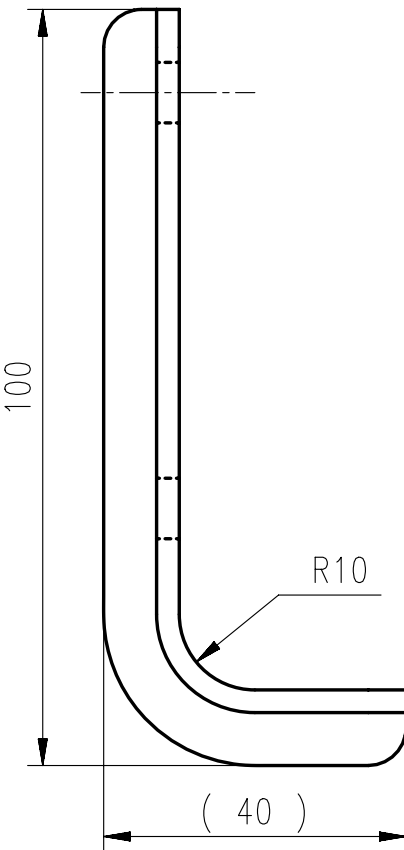

SECTION A-A
SCALE 1:1

ER14C0002710	AA		PRODUCTION RELEASE	AVA	OVK	DHM	10/07/1
E.R.NO.	LET	LOC	REVISIONS	DSNR	CKR.	APPR.	DATE

1. THE IDEAS /IGES GENERATED MATHEMATICAL DATA IS MASTER FOR THE PART.
2. ALL UNSPECIFIED RADII SHOULD BE ONE METAL THICKNESS.
3. PART MUST BE FREE FROM FRACTURE, FLASH & SHARP EDGES AND ANY SURFACE IMPERFECTIONS THAT MAY EFFECT FIT OR FUNCTION OF THE PART.

<SC> :SIGNIFICANT CHARACTERISTICS

▽:CRITICAL CHARACTERISTICS

BREAK SHARP CORNERS MAY BE EITHER A CHAMFER OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.

UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989

DIMENSIONS

LINEAR	OVER	0.5	3	6	30	120	400	1000	2000
IN mm.	UPTO	3	6	30	120	400	1000	2000	4000
f FINE	(X.XXX)	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	-
m MEDIUM	(X.XX)	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2
c COARSE	(X.X)	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3	±4
v VERY COARSE	(X)	-	±0.5	±1	±1.5	±2.5	±4	±6	±8

ANGULAR

IN deg.

OVER	-	10	50	120	400
UPTO	10	50	120	400	-

f FINE	(X.XXX)	±1°	±0°30'	±0°20'	±0°10'	±0°5'
m MEDIUM	(X.XX)	±1°30'	±1°	±0°30'	±0°15'	±0°10'
c COARSE	(X.X)	±3°	±2°	±1°	±0°30'	±0°20'
v VERY COARSE	(X)					

PART OF THIS DRAWING / DOCUMENT SHOULD NOT BE REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION OF M & M LTD.

COMPUTER GENERATED DRAWING

DO NOT CHANGE MANUALLY

IF IN DOUBT, ASK

DO NOT SCALE

DRG SIZE : A3

MAHINDRA & MAHINDRA LIMITED

TRACTOR DIVISION

KANDIVLI (EAST), MUMBAI 400 101, INDIA.

E.R. / PROC.REQ.NO :
ER14C0002710

PART NO. :
007542292C1

PART NAME :

RH FLOOR REAR MTG STIFFNER REAR

MATERIAL :
MM 11-D 3 mm THK,
AS PER G00 0169.

HEAT TREATMENT :

- - - -

	NAME	SIGN	DATE	FIRST USED TRCR. MODEL
CAD ENGG.	RAVI		24/03/11	M-STAR
DESIGNER	MD		24/03/11	SCALE 1:1
CHECKER	OVK		24/03/11	SHEET 1 OF 1
APPR.BY	RNM		24/03/11	UNIT QTY. : 1/TR
				WEIGHT : 0.1054kg.

ALL DIMENSIONS ARE IN mm.

CHECK DRG WITH LATEST CHANGE No